

EVELO

Product Overview

Product Description

Evelo: an mLight linear LED profile with optics and integrated control gear

Diffuser Options

Black or white louvre with optics in 287mm modules

- Spot
- Medium
- Wide
- Oval
- Oval Asymmetric

Plexiglas diffuser and blanks available

Finish Options

Anodised
Powdercoat black or white
Wood finish and other colours available upon request

Mounting Options

Wire Suspended
Rod Suspended
Recessed available soon

Light Source

Direct

mLight Bridge LED Boards
3000K, 4000K
CRI 80+, 90+

Indirect

LED Strip Lighting
3000K, 4000K
CRI 90+

Lumen Maintenance

50,000hrs to 80% Brightness

Driver Dimming Options

DALI
SwitchDIM

Power Consumption Range

3.6 to 9 W per 287mm module

Ambient Operating Temp



ta 0° to 35°C

Luminous Efficacy

Up to 112Lm/W

Luminous Flux Range


400 to 1000 Lm per 287mm module

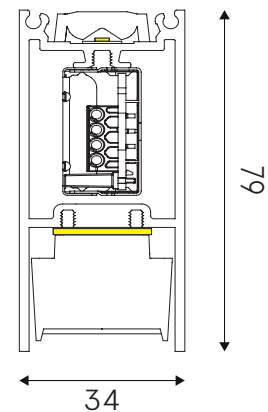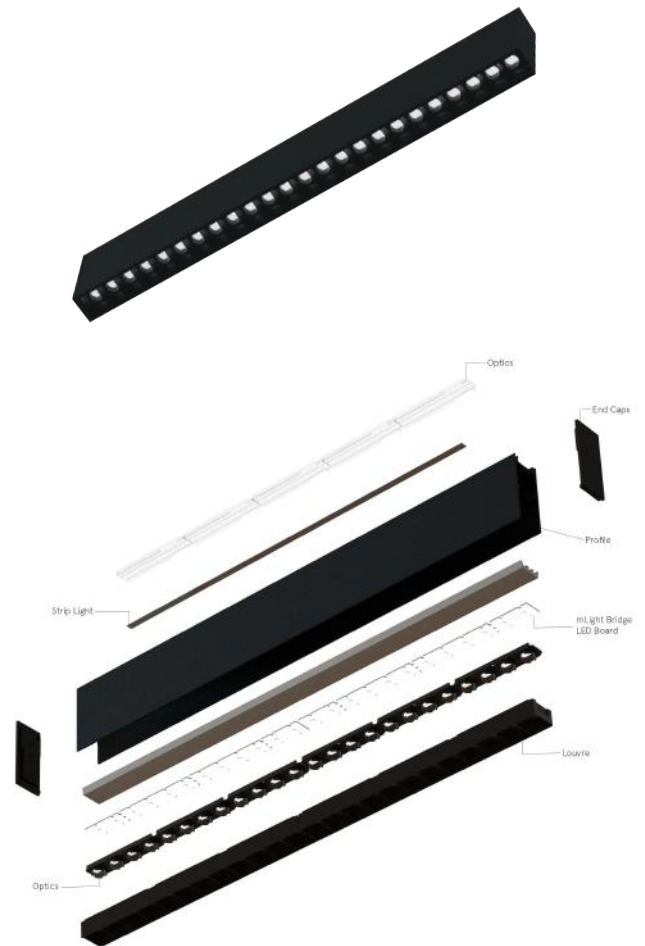


Technical specifications are correct at time of printing

EVELO


Light Distributions

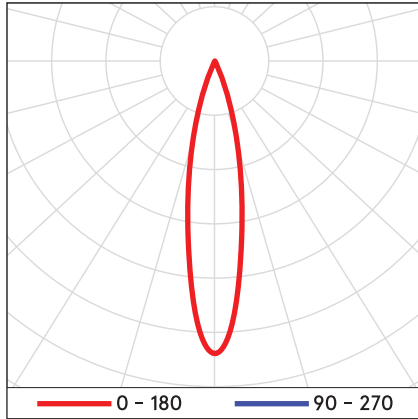


Spot

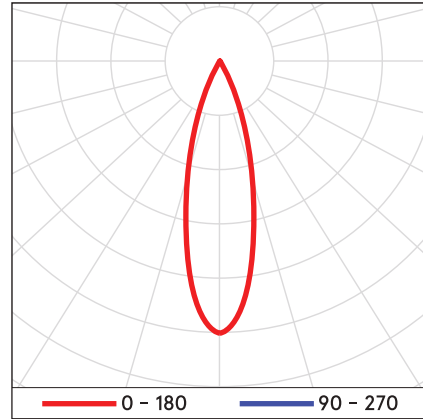


Medium

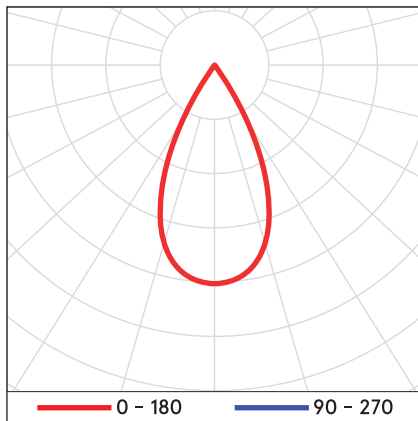


Wide

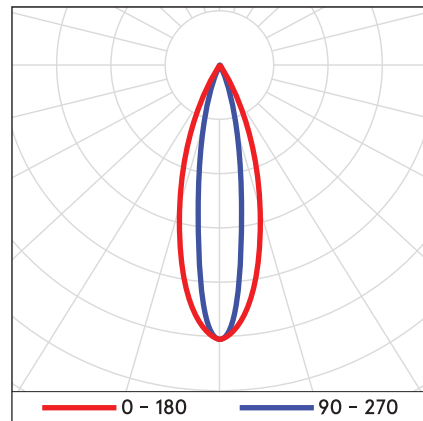

Oval

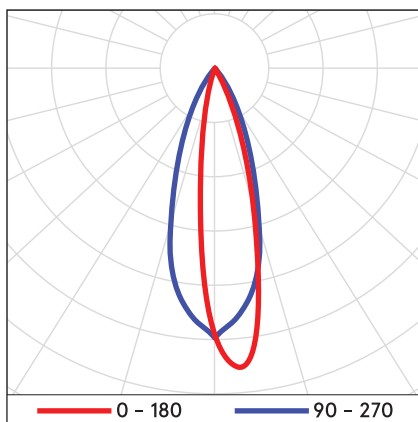

Oval Asymmetric

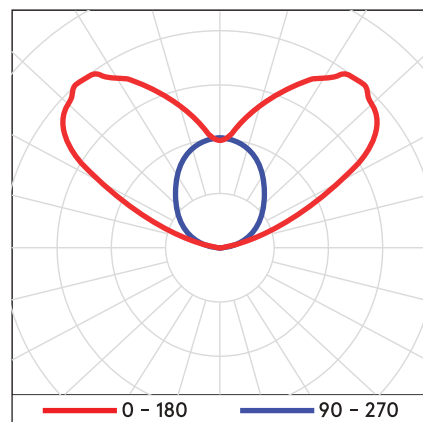

Indirect

IES Files available online
PhotoMetric Data NOTE: Values are approximate
Technical specifications are correct at time of printing